RDE Service
TOUS CORPS D'ÉTAT
RDE Service - 2 rue Le Corbusier, 95190 Goussainville - 07 56 90 60 94 - contact@rdeservice.fr - rdeservice.fr
DAIKIN
Prix posé et commande : https://rdeservice.fr/boutique/residentiel/

DAIKIN

SPLIT

Wall mounted unit

FTXA-CW + RXA-A9 / RXA-B / RXA-B9



BLUEVOLUTION stylish

Coanda effect - cooling

Coanda effect - heating

Intelligent thermal sensor


Multi model application

Where innovation meets creativity

› Compact design in matt crystal white
› Perfect temperature distribution thanks to Coanda effect
› Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
› Daikin Flash Streamer technology: powerful air purification
› Oh so quiet
› Onecta app
› Voice control
› Bluevolution range: lower environmental impact
› Seasonal efficiency values up to A+++ in cooling and heating

RDE Service
TOUS CORPS D'ÉTAT
RDE Service - 2 rue Le Corbusier, 95190 Goussainville - 07 56 90 60 94 - contact@rdeservice.fr - rdeservice.fr
Prix posé et commande : https://rdeservice.fr/boutique/residentiel/

FTXA-CW + RXA-A9 / RXA-B / RXA-B9

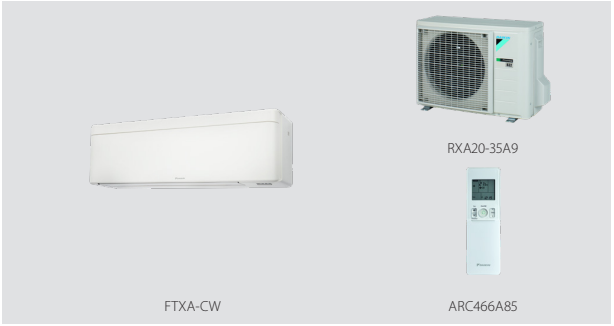

Indoor unit					FTXA	20CW	25CW	35CW	50CW	42CW
Dimensions	Unit	HeightxWidthxDepth			mm	295 x798 x189				
Weight	Unit				kg	11.5				
Air filter	Type					Removable / washable				
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High		m^3/min	4.6 /6.1 /8.2 /11.0	4.6 /6.1 /8.6 /11.5	4.6 /6.1 /8.6 /11.9	5.2 /7.6 /10.4 /13.5	4.6 /7.2 /9.8 /13.1
		Heating	Silent operation / Low / Medium / High		m^3/min	4.5 / 6.4 / 8.7 / 10.9	4.5 / 6.4 / 9.0 / 11.1	4.5 / 6.4 / 9.0 / 11.5	5.7 / 8.2 / 11.1 / 15.1	5.2 / 7.7 / 10.5 / 14.6
Sound power level	Cooling				dBA	57		60		
Sound pressure level	Cooling	Silent operation/Low/High			dBA	19 /25 /39	19 /25 /40	19 /25 /41	24 /31 /46	21 /29 /45
	Heating	Silent operation/Low/High			dBA	19 /25 /39	19 /25 /40	19 /25 /41	24 /33 /46	21 /29 /45
Control systems	Infrared remote control					ARC466A85				
	Wired remote control					BRC073A1				

Outdoor unit					RXA	20A9	25A9	35A9	50B	42B9
Dimensions	Unit	HeightxWidthxDepth			mm	550 x840 x350			734 x954 x401	
Weight	Unit				kg	32			49	
Sound power level	Cooling				dBA	59.0		61.0	62.0	
	Heating				dBA	59.0		61.0	62.0	
Sound pressure level	Cooling	Nom.			dBA	46.0		49.0	48.0	
	Heating	Nom.			dBA	47.0		49.0	48.0	
Operation range	Cooling	Ambient	Min.~Max.		°CDB	-10 ~46				
	Heating	Ambient	Min.~Max.		°CWB	-15 ~18				
Refrigerant	Type					R-32				
	GWP					675.0			675	
	Charge				kg/TCO2Eq	0.76 /0.52			1.10 /0.75	
Piping connections	Liquid	OD			mm	6.35			6.4	
	Gas	OD			mm	9.50			12.7	9.5
	Piping length	OU - IU	Max.		m	20			30	
	Additional refrigerant charge				kg/m	0.02 (for piping length exceeding 10m)				
	Level difference	IU - OU	Max.		m	15.0			20	
Power supply	Phase/Frequency/Voltage				Hz/V	1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA)				A	10	13			

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data				FTXA + RXA	20CW + 20A9	25CW + 25A9	35CW + 35A9	50CW + 50B	42CW + 42B9
Cooling capacity	Min./Nom./Max.			kW	1.30 /2.00 /2.60	1.30 /2.50 /3.20	1.40 /3.40 /4.00	1.70 /5.00 /5.30	1.70 /4.20 /5.00
Heating capacity	Min./Nom./Max.			kW	1.30 /2.50 /3.50	1.30 /2.80 /4.70	1.40 /4.00 /5.20	1.70 /5.80 /6.50	1.70 /5.40 /6.00
Power input	Cooling		Min./Nom./Max.	kW	0.27 /0.43 /0.63	0.27 /0.56 /0.78	0.31 /0.78 /1.04	-/1.36 /-	-/1.05 /-
	Heating		Min./Nom./Max.	kW	0.25 /0.50 /0.91	0.25 /0.56 /1.22	0.26 /0.99 /1.67	-/1.45 /-	-/1.31 /-
Space cooling	Energy efficiency class				A+++			A++	
	Capacity		Pdesign	kW	2.00	2.50	3.40	5.00	4.20
	SEER				8.75	8.74	8.73	7.33	7.50
	Annual energy consumption			kWh/a	80	100	136	239	196
Space heating (Average climate)	Energy efficiency class				A+++			A++	
	Capacity		Pdesign	kW	2.40	2.45	2.50	4.00	3.80
	SCOP/A				5.15			4.60	
	Annual energy consumption			kWh/a	652	666	680	1,218	1,156
Nominal efficiency	EER				4.70	4.46	4.37	3.68	3.99
	COP				5.00		4.04	4.00	4.12
	Annual energy consumption			kWh	213	280	389	679	526
	Energy labeling Directive	Cooling/Heating			A/A				
Current - 50Hz	Maximum fuse amps (MFA)			A	10.00	13.00			

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)

EUROVENT CERTIFIED PERFORMANCE www.eurovent-certification.com

Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN24-052 09/2023

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.